

WaterSoft

ISOBAR[®] 4
Control Valve



PROVETR™ PLUS Filter Manual

Installation / Operation Manual

For all AFAC Models





WaterSoft remains dedicated to the same enthusiasm and commitment to innovation that made them successful in the 1980's. With the always evolving line of Isobar control valves, the industry-leading Centuri & Sidewindr iron filters, and many new products on the horizon, WaterSoft remains focused on providing clean, safe water for your residential and commercial needs.

CONTACT US

Address

710 Orange Street
Ashland, Ohio 44805

Office Hours

8:00am – 5:00pm
Monday – Friday

Phone: 800.462.3790

Phone: 419.289.1500

Fax: 419.289.1515

www.watersoftinc.com

FCC Compliance Statement:

http://www.chandlersystemsinc.com/files/FCC_Compliance_Statement.pdf

Industry Canada Compliance Statement:

http://www.chandlersystemsinc.com/files/Industry_Canada_Compliance_Statement.pdf

One or more features of this product are covered by U.S. patents, visit <https://chandlersystemsinc.com/wp-content/uploads/2024/03/Chandler-Systems-Product-Patents.pdf> for more information.

Table of Contents


Precautions	4
Installation	5
Installation Requirements	5
Filter Set-up	6
Filter Location / Other Requirements	6
Installation / Procedure	6
Drain Line Connection	7
Electrical Connection	7
Battery Back-Up Features	7
Pressurizing The System	8
System Set-Up	9
Programming w. Legacy View App	11
Dashboard	11
Advanced Settings	12
Status and History	13
Manually Programming The Control Valve	15
Normal Operation	15
Starting Extra Regeneration Cycle	16
Master Programming Mode	17
Final Check	18
Operation, Care and Cleaning	18
Skip A Regeneration	18
General Care and Cleaning	18
Troubleshooting	19
Error Codes	20
Output Info	21
Warranty	23

Precautions



WaterSoft
ISOBAR 4
Sidewindr™ Filter Manual
Installation / Operation Manual
For all SW Models

Read the Instruction Manual

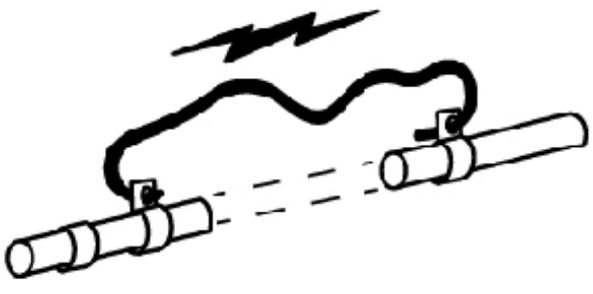

The diagram shows a horizontal copper pipe with a dashed line indicating a gap. A black grounding strap is connected to the pipe on both sides of the gap. A lightning bolt symbol is positioned above the pipe, indicating the need for grounding to prevent electrical hazards.

If existing plumbing is copper, install grounding strap before creating plumbing gaps.

WARNING

Lubricants

Do NOT use Vaseline, oils, hydrocarbon lubricants or spray silicone anywhere! Petroleum base lubricants will cause swelling of o-rings and seals. The use of other lubricants may attack plastic Noryl®. It is recommended that Dow Corning® silicone grease be used as a lubricant for all control valves. Dow Corning® 7 Release Compound is used in the manufacture of Chandler Systems control valves. (Part # LT-150)

Sealants

Pipe dope and liquid thread sealers may contain a carrier that attacks some plastic materials. It is recommended that Teflon® tape be used to seal plastic Noryl® threaded fittings.

Installation

-How the Provectr PLUS Works_

The Provectr PLUS requires no chemicals for its operation. It consists of two components: (1) AP tank with air compressor and (2) filter tank. The first item serves to oxidize and precipitate iron and sulfur so that the filter can later remove them. The water flows down through the mineral bed of the filter and out the service lines. The collected precipitates must be regularly removed from the filter by reversing the flow of water through the filter running to drain. Called "backwashing" and lasting 10 minutes, the process expands the mineral freeing the iron, sulfur, manganese and turbidity, which are washed out of the filter to the drain. It is important that the correct amount of water is available for the Backwash Cycle. Check pumping capacity to be certain water is available in sufficient volume to adequately backwash the equipment at the specified rate.

PLEASE NOTE THESE SPECIFICATIONS BEFORE PROCEEDING

OPERATING PRESSURE RANGE : 20 - 125 PSI

OPERATING TEMPERATURE RANGE : 33° F - 120° F

INLET / OUTLET PIPE SIZE : 1" MNPT

PLEASE COMPLY WITH ALL APPLICABLE PLUMBING CODES

PROTECT THE SOFTENER AND PIPING FROM FREEZING TEMPERATURES

Please read the entire Owner's Manual and Instruction before installation.

-Installation Requirements-

A/P Tank

- A level floor position between the well pump and pressure tank. (See Typical Installation Diagram.)
- DO NOT install in an area of direct sunlight or where freezing temperatures may occur!

Filter Tank

- A level floor position ahead of piping into water heater.
- Unit must be installed at least 10' ahead of the inlet to a water heater to prevent damage due to back-up of hot water.
- DO NOT install the unit in an area of direct sunlight or where freezing temperatures may occur! (See Typical Installation Diagram.)

Relay Box

- Locate relay box near the filter tank and an unswitched 120v / 60 Hz grounded outlet


Note: If household plumbing is galvanized and you intend to make an installation with copper or vice versa, obtain dielectric unions to prevent dissimilar metal corrosion.

Where the drain line is elevated above the control valve or exceeds 20 ft. in length to reach the drain, use 3/4 in. I.D. drain line tubing instead of 1/2 in.

When sweat soldering copper pipe, remember to always use lead free solder and flux. Cover yoke and bypass valve with wet rags to prevent heat damage to connections and control valve. If using PVC or plastic pipe, primers and solvent cements specifically recommended for use for potable water are required.

Always Follow Local Plumbing Codes.

- All plumbing lines not requiring treated water should be connected upstream of the Provectr Plus tank.

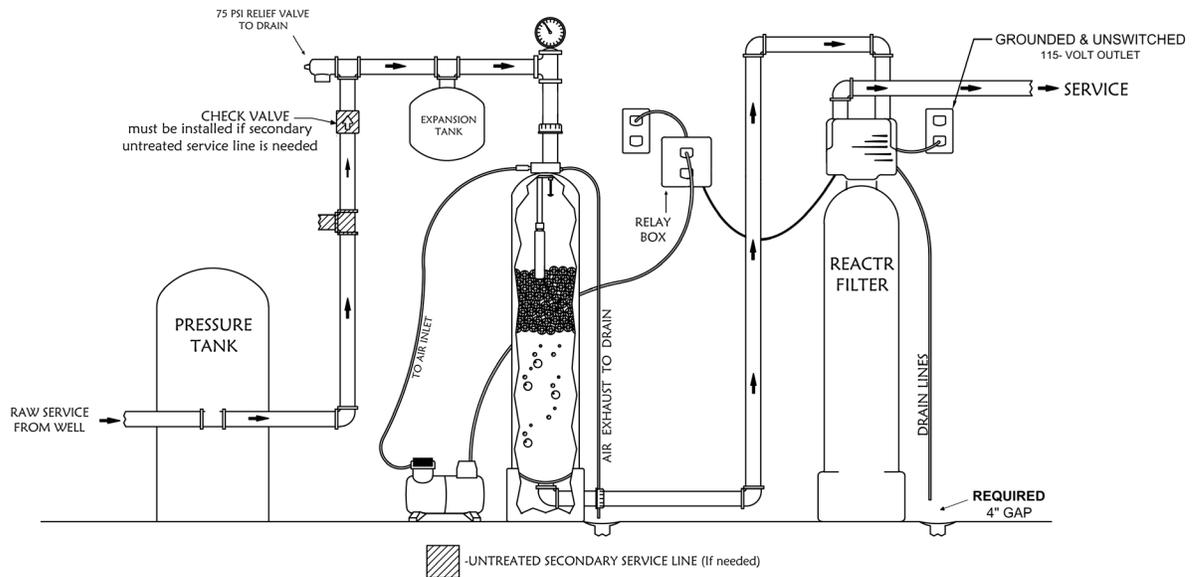

-Provectr PLUS Location / Other Requirements-

- Locate the filter near a 120 volt / 60 Hz grounded electrical outlet.
- Check for distance and proper drain installation (e.g. floor drain, washing machine standpipe).
- Determine type and size of piping required for Provectr PLUS connection (e.g. galvanized, PVC plastic).

Note: If household plumbing is galvanized and you intend to make an installation with copper (or vice versa), obtain di-electric unions to prevent dissimilar metal corrosion.

Note: Where the drain line is elevated above the control valve or exceeds 20' in length to reach the drain, use 3/4" I.D. drain line tubing instead of 1/2" I.D. Drain line tubing is not included.

Caution: When sweat soldering copper pipe (remember to always use lead free solder and flux), bypass valve with wet rags to prevent heat damage to connections and control valve! If using PVC or plastic pipe, primers and solvent cements specifically recommended for use with potable water are required.

Note: All plumbing lines not requiring "filtered" water should be connected "upstream" of the A/P Tank. (See Typical Installation Diagram.)

-Installation Procedure-

1. Position Provectr PLUS tank and Filter tank at the desired location. The Provectr PLUS tank must be installed between the pump / pressure tank and filter tank. If a water softener is to be installed, it should be positioned after the filter tank.
2. The filter media is shipped separately from the filter tank and should be loaded prior to installation.
 - a) Remove control valve by unscrewing it from the filter tank.
 - b) Plug distributor with cap provided to prevent any media from entering the inside of the tube.
 - c) Place media funnel onto tank and fill tank 1/3 with water
 - d) Pour in media. Never fill tank more than 2/3 full to allow room for backwash. Since the Provectr PLUS comes with a Vortech tank, gravel is NOT needed.
 - e) Remove cap and replace control valve.
3. Turn off main water supply and open nearest faucet to relieve pressure.
4. Cut main line and install the AP tank and Filter tank.
5. Turn on main water supply and allow water to flow through new plumbing and keep the nearest faucet open to evacuate air.

6. Check for leaks.
7. If no leaks, proceed by slowly opening the bypass and allow water to fill the filter tank.
8. Allow water to run through the filter for a few minutes and then turn off the nearest faucet.

Caution: Raised arrows located on the sides of control valve body and bypass valve indicate proper direction of water flow. Install inlet and outlet piping in direction of arrows. It is recommended that a vacuum breaker be installed on the inlet plumbing.

- Air Compressor / Relay Box -

- Locate the air compressor in close proximity to the AP tank assembly.
- Connect the supplied tubing to the compressor and the other end to the AP tank manifold insert.
- Insert the compressor's electrical plug into the relay box. Open relay box cover and remove shipping packaging, then close cover.
- Insert the electrical plug from the relay box to an unswitched 120v / 60Hz grounded outlet.
- Attached by the relay box are two cords. One is labeled compressor and the other oxyclean.
- Remove cover from control valve and feed the two cords under the lower front portion of the valve.
- Insert cord labeled compressor into port "S" and cord labeled oxyclean into port "B". Replace cover.

Note: As water flows through the filter, the meter will turn and send a signal to the relay box and the relay box will turn on the air compressor after 3 gallons of run time. Make sure air compressor switch is turned on.

- Drain Line Connection -

Install 1/2" I.D. drain line tubing (not included) from hose barb to an open drain. A 4" gap between end of the drain line and the open drain is required to prevent waste water backflow. Keep the drain line as short as possible. An overhead drain line can be used if necessary, but should discharge below the control valve. A syphon trap (taped loop) at the outlet of the drain line is advisable to keep the drain line full and assure correct flow during backwash. Elbows or other fittings must be kept at a bare minimum.

Note: Where the drain line is elevated above the control valve or exceeds 20 feet in length, 3/4" I.D. drain line tubing should be used.

- Electrical Connection -

Connect the power cord to the control valve and plug power supply into a 115 volt / 60 Hz receptacle.

Note: Do not plug into an outlet controlled by a wall switch or pull chain that could inadvertently be turned off

-Battery Back-Up Features-

(Uses a standard 9-volt alkaline battery.)


- During power failures, the battery will maintain the time of day as long as the battery has power. The display is turned off to conserve battery power during this time. To confirm that the battery is working, press either button on the circuit board. The display will turn on for five (5) seconds.
- If power failure occurs while system is regenerating, the valve will motor to a shut off position prevent constant flow to drain. Depending upon system pressure and other factors, it is possible to observe a reduced flow to drain during this step. After power is restored, the valve will return and finish the cycle where it left off prior to the power interruption.
- When used without battery back-up, during a power failure, the unit stops at its current point in the regeneration position and then restarts at that point when the power is restored. The time will be offset by the increment of time the unit was without power, so it is necessary to reset the time of day on the unit. No other system will be affected.

- Pressurizing The System -


1. Make certain *Isobar 4* Valve is in **SERVICE** position.
2. Slowly rotate bypass valve to the **SERVICE** position.
(Position of bypass knobs is parallel to inlet / outlet piping.)
3. Allow tanks to pressurize. Check for leaks!
4. Open the nearest faucet to evacuate air from plumbing lines.
5. After air is evacuated from plumbing lines, close bypass (position of both bypass knobs is perpendicular to the direction of inlet pipe).

System Set-Up


Unpack equipment. Connect bypass valve, connectors. Attach components by pushing the adapters together and tightening the nuts by hand until they feel snug. Position system on a hard level surface with access to inlet plumbing, drain and electrical outlet.

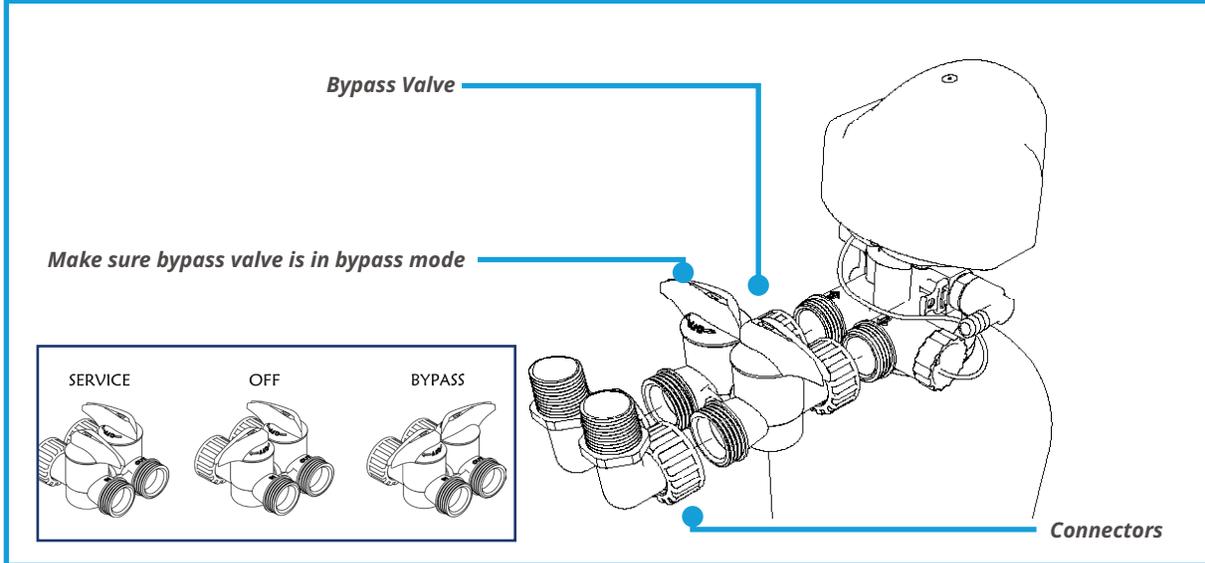


Turn off main water supply and open nearest cold faucet to relieve pressure. Cut water supply line, and connect plumbing to the inlet and outlet accordingly.
Note: Inlet and outlet connections are 1" NPT.
Additional piping and / or fittings may be necessary

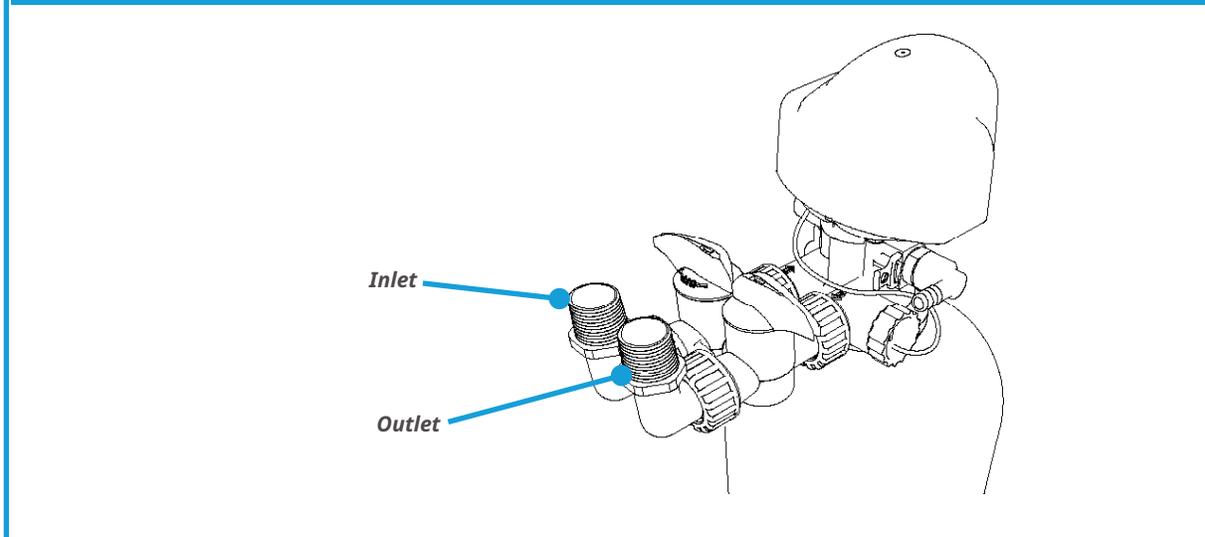


Connect drain line to barbed drain adapter and run to appropriate discharge point. Use a 1/2" minimum pipe size for the drain. Use a 3/4" drain line for runs that exceed 20 feet. Make connection to a sanitary waste system through an air gap of 2 pipe diameters or 1", larger. Do not tee into any other drain lines.

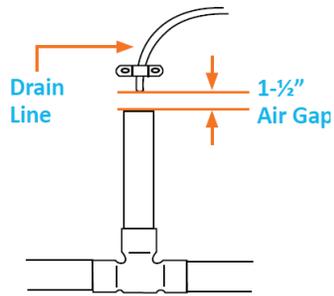

Stand Pipe

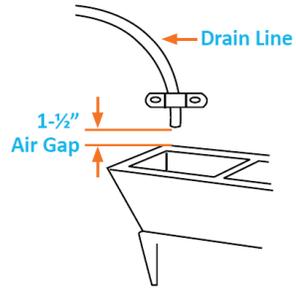

Stand Pipe

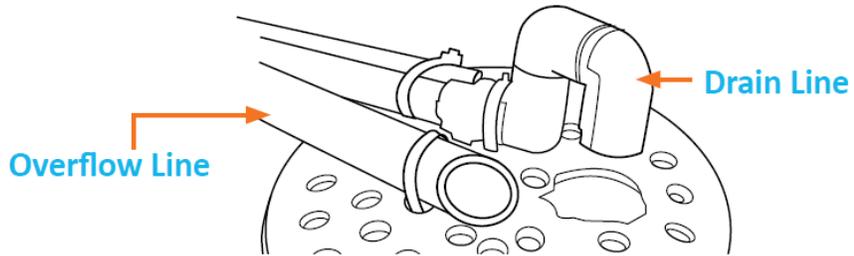

Programming w. Legacy View App



For simplified set up and control, please install the **Legacy View** on a compatible Bluetooth 4.0+ enabled smart phone or tablet.



1. Download and install the **Legacy View** app from the Google Play Store, Apple App Store
2. Open the Legacy View app
 - Choose a valve device at any time from the list of available devices to connect to by clicking on it.
 - If the valve you want to connect to doesn't show up, or there is a problem connecting to a device you can press the "Scan for Devices" button or the Legacy View logo at any time to refresh the list and start the process over.
 - If the valve device is a BTLE valve and it has a password other than the default password, the first time you connect to it the app will ask you to enter the password. After entering it the first time you should not need to enter it again unless it changes.
3. BTLE Valve devices can be updated by the App. When the app is updated from the Google Play Store or the Apple App Store, it may contain an updated firmware program for the valve devices. These updates could contain new features or operational improvements. It is up to the user to allow these updates to be sent to the valve device. Uploading a new program takes approximately 1 minute.




-Dashboard-

NOTE: Consult your dealer before making any changes

From the **Dashboard**, all items in **ORANGE** can be changed, while blue fields are informational only.



If you are unsure about the function of the field click the for more information.

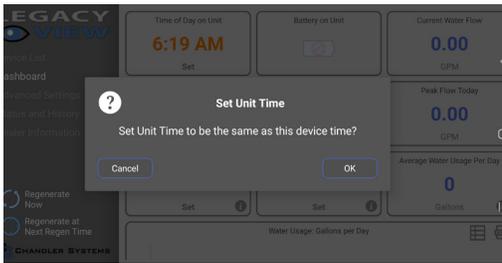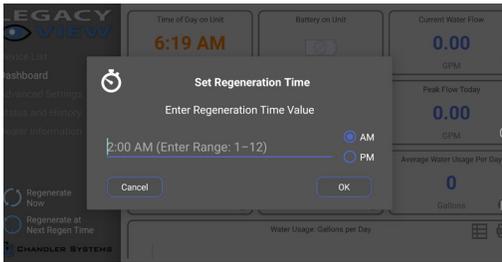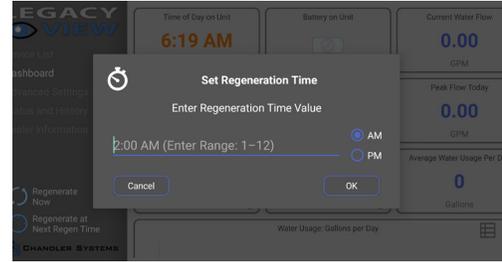	<p>Change Time of Day</p> <p><i>Press "SET" to set time automatically based on device.</i></p>
	<p>For Filters:</p> <p>Days Between Regeneration</p>
	<p>Set Regeneration Time</p> <p><i>Example: For 2a.m. just type 2, choose a.m., and press 'OK'</i></p> <p><i>Note: If you have a filter and a softener the valves should be set to regenerate at different times.</i></p> <p><i>Factory default times are 12a.m. for filters, and 2 a.m. for softeners.</i></p>

-Advanced Settings-

NOTE: Consult your dealer before making any changes. We do not recommend changing Advanced Settings unless you have a good understanding of the system operation.

From the **Advanced Settings**, all items in **ORANGE** with a "set" button can be changed.

-Status and History-


From the **Status and History**, all items in **ORANGE** can be reset.




Pressing this icon will show a list of the data that is in the graph.

Touch any graph to enlarge and see details. Enlarged graphs are able to be zoomed in by pinching with two fingers. (Enlarged graph shown below)

Pressing the .csv logo in the corner will allow the graph data to be exported and shared.

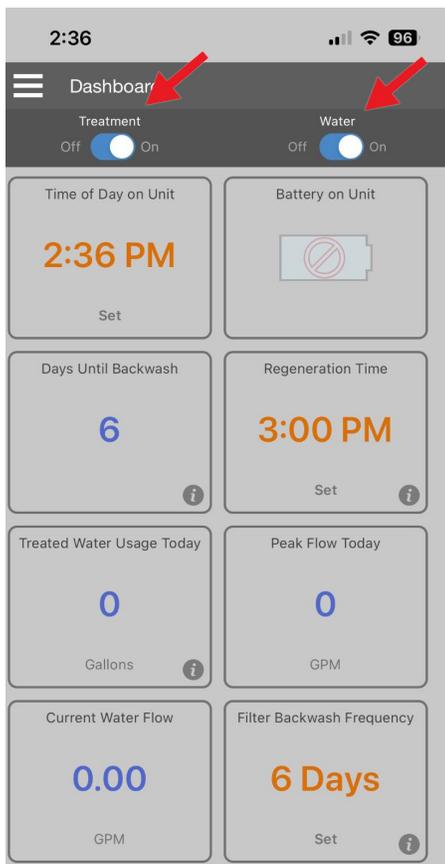

- *Treatment button can initiate the bypass on and off.*
- *Water button can turn the main water on and off downstream from the unit.*

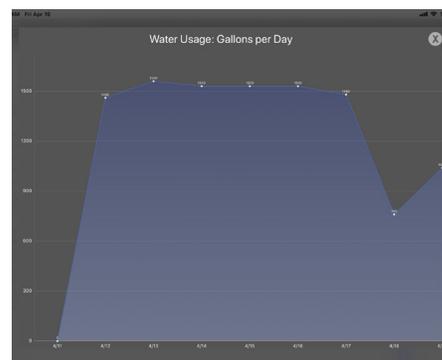

Enlarged graph showing water usage

Starting a regeneration or backwash cycle

Option 1:



Click the "Regenerate Unit Now."




Once a regeneration has been started, if you would like to force the unit into the next cycle step click "Go to Next Regeneration Step".

Option 2:



"Regenerate Unit at Next Regen Time" button. This will take the system into a backwash cycle at the next regeneration time.

Manually Programming the Control Valve

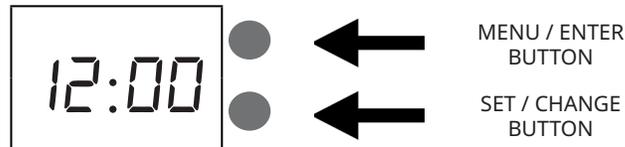

1. To enter Main Menu, press the **Menu/Enter** button.
(Time of Day will flash)
2. To set the **Time of Day**, press the **Set/Change** button.
(First digit will flash) Example [12:00]
 - To change digit value, press the **Set/Change** button.
 - To accept the digit value, press the **Menu/Enter** button.
 - Next digit will flash to begin setting.
 - Once the last digit display is accepted, all digits will flash.
3. To set **A.M.** or **P.M.**, press the **Menu/Enter** button. Example [A]
 - To change digit value, press the **Set/Change** button.
 - To accept the digit value, press the **Menu/Enter** button.
 - Once A.M. or P.M. is accepted, the next menu item will flash.
4. a. To set the **Number of Days between Backwash Cycles (A)**, press the **Set/Change** button. Example [A - 06]
 - Repeat instructions from step (2).

Notes: 1) Maximum value is 29.
2) If value set to 0, Automatic Backwash will never occur.
3) Default setting is 6 days for filters.
5. To Exit Main Menu, press the **Menu/Enter** button.
Note: If no buttons are pressed for 60 seconds, the Main Menu will be exited automatically.

-Normal Operation-

1. Home Display

- a. Alternates between the display of Time of Day and Number of Days until the Next Backwash.
(Metered Softeners will alternate between time of days and gallons remaining until next regeneration)

- Days Remaining until the Next Backwash will count down from the entered value until it reaches 1 day remaining.
- A Backwash Cycle will then be initiated at the next designated regeneration time.

2. Battery Back-Up (Uses a standard 9-volt alkaline battery.)

Features of Battery Back-Up:

- During power failures, the battery will maintain the time of day as long as the battery has power. The display is turned off to conserve battery power during this time. To confirm that the battery is working, press either button and the display will turn on for five (5) seconds.
- If power failure occurs while system is regenerating, the valve will motor to a shut off position to prevent constant flow to drain. Depending upon system pressure and other factors, it is possible to observe a reduced flow to drain during this step. After power is restored, the valve will return and finish the cycle where it left off prior to the power interruption.
- When used without battery back-up, during a power failure, the unit stops at its current point in the regeneration position and then restarts at that point when the power is restored. The time will be offset by the increment of time the unit was without power, so it is necessary to reset the time of day on the unit. No other system will be affected.

-Starting Extra Regeneration Cycle-

1. To Start **Delayed Extra Cycle**

Example (1)

- If Days Remaining Until Next Backwash does not read '1', press and hold the **Set/Change** button for 3 seconds until the display reads '1'.
- Backwash cycle will initiate at the next designated backwash time.

2. To start **Immediate Extra Cycle**



First complete above step.

- With Days Remaining Until Next Regeneration at '1'.
- Press and hold the **Set/Change** button.
- After 3 seconds, the backwash cycle will begin.

3. To **Fast Cycle** thru regeneration



First complete above 2 steps.

Note: Press and hold the **Set/Change** button for 3 seconds to advance to the next cycle step. Fast Cycle is not necessary unless desired to manually step through each cycle step. (Repeat until valve returns to the home display)

Filters	Default (Min)	
Step 1	Backwash	10
Step 2	Rest	20
Step 3	Rapid Rinse	16
Step 4	Not Used	0

Master Programming the Control Valve

To enter Master Programming Mode, press and hold both buttons for 5 seconds.

Note: All Master Programming functions have been preset at the factory. Unless a change is desired, it is **NOT** necessary to enter Master Programming Mode.

1. Regeneration Time (r)

Example [r 12A]

- The time of day at which backwash may take place is designated by the letter "r".
- Default regeneration time settings is **12a**
- The first display digit indicates A.M. or P.M. To change the value, press the **Set/Change** button.
- Press **Menu/Enter** button to accept the value and move to the next digit.
- The second and third display digits indicate the hour at which the backwash will occur.
- Change the digits with the **Set/Change** button and accept with the **Menu/Enter** button.
- After the entire display flashes, press the **Menu/Enter** button to move to the next menu item.

2. Regeneration Cycle Step Times (Steps 1, 2, 3, 4)

Example [3 - 10]

- The next 4 displays set the duration of time in minutes for each backwash cycle step.
- The step number which is currently modifiable is indicated on the far left of the display screen.
- The number of minutes allotted for the selected backwash step is displayed on the far right.
- Change the digit values using the **Set/Change** and **Menu/Enter** buttons as described above.

3. Bluetooth Enabled

bE - 1 (ON)

bE - 0 (OFF)

4. Bluetooth Password

bbPP is displayed for one second, then password is displayed.

5. Display Off

da - 0 - Default setting. Display is always on

da - 1 - "Display Off" is enabled. Display will go to sleep when not in use. Display will turn on for 3 seconds when a button is pushed.

6. To Exit the Master Programming Mode, press the **Menu/Enter** button until time of day returns.

Note: If no buttons are pressed for 60 seconds, the Master Programming Mode will be exited automatically.

- Final Check -

1. Be certain the bypass valve is in the SERVICE position.
2. Make sure the power supply is connected to an uninterrupted 115-volt outlet.
3. Check that the time of day is set
4. Double check regeneration schedule.
5. Make final check for leaks.
6. Fill out warranty card online at <https://WaterSoft h2o.com/register-your-product/>
7. Leave all manuals with unit.

- Operation, Care and Cleaning -

When the bypass valve is in the **SERVICE** position (position of bypass knobs is parallel to the inlet / outlet piping), water is directed through the water softener. Water may be bypassed by turning the knobs to the bypass position (position of bypass knobs is at right angles to inlet / outlet piping). Water to the home will bypass the softener and be untreated.

You should manually bypass the filter if:

1. The outside lines do not bypass the water filter and water is to be used for lawn sprinkling or other similar uses.
2. Servicing the water filter.
3. A water leak from the water softener is evident.
4. Shock treating water well and piping with chlorine or other disinfectant.

- To Skip A Regeneration -

1. For vacations or extended periods of absence, the power supply can be disconnected from the control valve. It is recommended that the 9-volt battery be removed.
2. Upon return, plug in cord and reset the time of day. Replace 9-volt battery.

- General Care and Cleaning -

1. Do not place heavy or sharp objects on water softener or cabinet.
2. Use only mild soap and warm water to clean exterior of the unit. Never use harsh, abrasive cleaners.
3. Protect the water softener and drain line from freezing.
4. Reset time for daylight saving time periods.
5. Replace 9-volt battery once a year.
6. Inspect and clean the brine tank when sediment appears in the bottom of the salt compartment.
7. Always keep the brine tank supplied with good quality salt, a type designed for use in water softeners.

Troubleshooting

SYMPTOM	PROBABLE CAUSE	CORRECTION
1. Filter Fails to Regenerate Automatically	Power supply plugged into intermittent or dead power source	Connect to constant power source
	Improper control valve programming	Reset program settings
	Defective power supply	Replace power supply
	Defective Drive motor	Replace motor
2. Regeneration at Wrong Time	Time of day improperly set, due to power failure	Reset time of day programming and install 9-volt battery.
	Regeneration time set improperly	Reset regeneration time programming
4. Poor Water Quality	Check items listed in #1 and #2	
	Bypass valve open	Close bypass valve.
	Channeling	Check for too slow or high service flow. Check for media fouling.
6. Loss of Water Pressure	Scaling / fouling of inlet pipe	Clean or replace pipeline. Pretreat to prevent.
	Fouled media	Clean media. Pretreat to prevent.
	Improper backwash setting	Backwash more frequently
7. Continuous Flow to Drain	Foreign material in control	Call dealer. Clean valve and replace piston and seals
	Internal control leak	Same as above.
	Valve jammed in backwash, brine or rapid rinse position	Same as above.
	Motor stopped or jammed	Check for jammed piston. Replace piston and seals. Replace motor if motor is unresponsive.

Error Codes

Control Valve Error Code Diagnosis

Under normal operating conditions, when your control valve is in the “in service” position, the display should alternate between the current time of day and the number of days remaining (for filters and time clock softeners) or gallons remaining (for metered softeners) until the next regeneration. This is the “home display.” If the valve is currently going through a regeneration cycle, the display will show the cycle step on the left side of the display and the number of minutes remaining in that step on the right side of the display. If any other information is being displayed, then the valve is informing you of an issue. There are five error codes which could indicate an issue with the control valve. When an error is being displayed, the valve will be in a stopped position, and the buttons will not respond to being pressed. Even if the cause of the error code is corrected, the error code will not clear until the power supply has been disconnected and reconnected (this will be referred to as “cycling” the power). All error codes are displayed as the letters “Err” followed by a flashing number 2-6:

Error 2 - Valve is searching for homing slot.

Allow valve to continue running. If the homing slot is found, the valve will return to the home display, otherwise, another error code will appear.

Error 3 - No encoder slots are being seen.

This occurs when the motor is running, but the encoder is not seeing any of the slots in the encoder wheel. This can happen if the encoder has been disconnected, but most commonly occurs when debris in the valve body has stopped the piston, causing the encoder wheel to be unable to turn.

Error 4 - Unable to find homing slot.

Error 5 - Motor overload.

This occurs when the motor current is too high. This could be caused by an issue with the motor itself, but is typically caused by friction in the valve body

Error 6 - No motor current.


This typically occurs if the motor cable has come unplugged from the circuit board. Check that the motor cable is plugged into the circuit board and attached to the motor. If this is not the issue, the motor or circuit board may need to be replaced.

No Display

If your display is blank, there is no power going to the circuit board due to one of the following factors:

- The electrical outlet is not powered or is switched off
- The power cable has come unplugged from the circuit board
- The power supply has come unplugged from your electrical outlet
- The power supply has come unplugged from the control valve
- The power supply is not working

Output Info

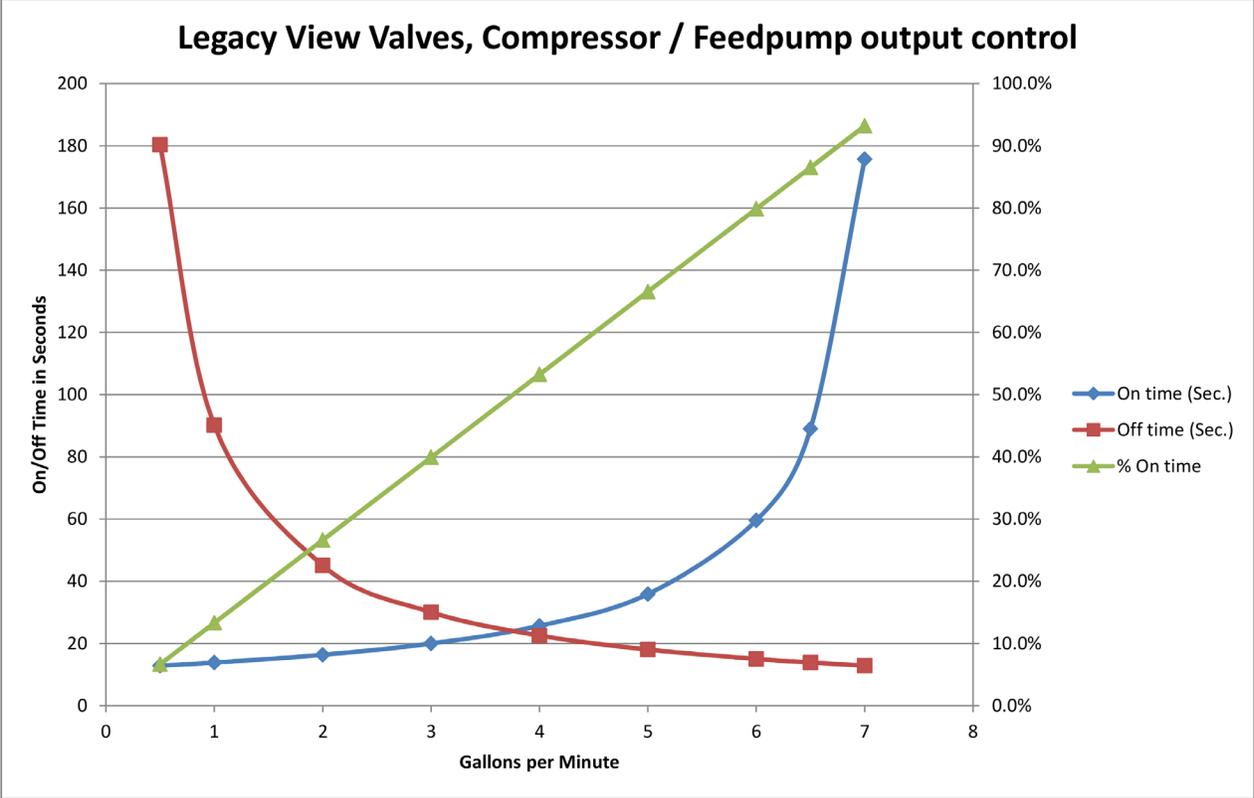

Warranty

WATER TREATMENT EQUIPMENT

This warranty cannot be transferred - it is extended only to the original purchaser or first user of the product. By accepting and keeping this product, you agree to all of the warranty terms and limitations of liability described below.

Important Warning: Read carefully the WaterSoft Water Treatment Systems Equipment Installation, Operating and Maintenance Instructions Manual to avoid serious personal injury and property HAZARDS and to ensure safe and proper care of this product.

Model Numbers Covered:
Water Softeners, Media Filters and Upflow Filters

*FOR AS LONG AS YOU OWN AND LIVE IN YOUR SINGLE FAMILY HOME, this warranty covers your water treatment equipment, if you are the first user of this WaterSoft Water Treatment Systems equipment and purchased it for single family home use - subject to all of the conditions, limitations and exclusions listed below. Purchasers who buy the WaterSoft Water Treatment Systems equipment for other purposes, and other component parts are subject to more limited warranties and you should read all of the terms included in this form to make sure you understand your warranty.

What is covered by this warranty?

WaterSoft Water Treatment Systems warrants that at the time of manufacture, the water treatment equipment shall be free from defects in material and workmanship as follows :

Product	Warranty
Residential Mineral Tank	10 Years
Proprietary Control Valves	7 Years
Other Softener / Filter Control Valves	5 Years
Brine Tank	5 Years
Residential Reverse Osmosis System	5 Years
Other Accessories and Parts	1 Year
Brine Tank Components	1 Year

* This warranty does not include media and/or cartridge filter elements.

Additional Terms & Conditions

What WaterSoft Water Treatment Systems will do if you have a covered warranty claim WaterSoft will at its option either make repairs to correct any defect in material or workmanship or supply and ship either new or used replacement parts or products. WaterSoft will not accept any claims for labor or other costs.

Additional Exclusions and Limitations

This warranty is non-transferable and does not cover any failure or problem unless it was caused solely by a defect in material or workmanship. In addition, this warranty shall not apply :

- If the water treatment equipment is not correctly installed, operated, repaired and maintained as described in the Installation, Operating & Maintenance Instructions Manual provided with the product.
- Defects caused as a direct result of the incoming water

quality

- If the tank is not the size indicated for the supply line size of the installation, as described in the manual.
- To any failure or malfunction resulting from abuse (including freezing), improper or negligent handling, shipping (by anyone
- If the unit has not always been operated within the factory calibrated temperature limits, and at a water pressure not exceeding 125 psi other than CSI), storage, use, operation, accident; or alteration, lightning, flooding or other environmental conditions;
- To any failure or malfunction resulting from failure to keep the unit full of potable water, free to circulate at all times; and with the tank free of damaging water sediment or scale deposits;
- This warranty does not cover labor costs, shipping charges, service charges, delivery expenses, property damage, administrative fees or any costs incurred by the purchaser in removing or reinstalling the water treatment equipment.
- The warranty does not cover any claims submitted to WaterSoft more than 30 days after expiration of the applicable warranty, and does not apply unless prompt notice of any claim is given to an authorized WaterSoft Dealer or to WaterSoft or a designated contractor is provided access to the installation and to the water treatment equipment.

THESE WARRANTIES ARE GIVEN IN LIEU OF ALL OTHER EXPRESS WARRANTIES. NO WaterSoft REPRESENTATIVE OR ANY OTHER PARTY IS AUTHORIZED TO MAKE ANY WARRANTY OTHER THAN THOSE EXPRESSLY CONTAINED IN THIS WARRANTY AGREEMENT.

Additional Warranty Limitations

ANY IMPLIED WARRANTIES THE PURCHASER MAY HAVE, INCLUDING THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE, SHALL NOT EXTEND BEYOND THE APPLICABLE TIME PERIODS SPECIFIED ABOVE. Some states do not allow limitations on how long an implied warranty lasts, so the above limitations may not apply to you.

Limitations of Remedies

The remedies contained in this warranty are the purchaser's exclusive remedies. In no circumstances will WaterSoft or the seller of the product be liable for more than, and purchaser-user's remedies shall not exceed, the price paid for the product. In no case shall WaterSoft or seller be liable for any special, incidental, contingent or consequential damages. Special, incidental, contingent and consequential damages for which WaterSoft is not liable include, but are not limited to, inconvenience, loss or damage to property, consequential mold damage, loss of profits, loss of savings or revenue, loss of use of the products or any associated equipment, facilities, buildings or services, downtime, and the claims of third parties including customers. Some states do not allow the exclusion or the limitation of incidental or consequential damages, so the above limitations or exclusion may not apply to you.

What to do if you have a problem covered by this warranty
Any warranty coverage must be authorized by WaterSoft Contact the person from whom you purchased the product, who must receive authorization from a WaterSoft Dealer .

If your product is new and not used and you wish to return it, contact your WaterSoft Dealer.

710 Orange Street
Ashland, OH 44805

www.watersoftinc.com

IMPORTANT NOTICE

Chandler Systems, Inc. reserves the right to make changes, corrections, enhancements, modifications, and improvements to products and/or to this document at any time without notice. Purchasers should obtain the latest relevant information on Chandler Systems, Inc. products before placing orders. Information in this document supersedes and replaces information previously supplied in any prior versions of this document.